

SPECIFICATION

The GT-001-GE energy monitoring dongle is for collecting energy consumption data in order to generate energy report. ETC dongle also has RTC (Real Time Clock) Function The GT-001-GE is a Real Time Clock for time syncing for all devices in one Zone.

OVERVIEW

- GT-001-GE is suitable for a variety of indoor applications.
- Powered by USB-A receptacle.
- Constructed of white/black PC.

Note:



Bluetooth Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for range accuracy.

LISTINGS

- FCC
- ETL
- DLC
- Bluetooth®
- Declaration ID: D062134

Press and hold the "S1" and "S3" button for 5 seconds until the green light starts to blink. You can scan and add Gateway by APP.

Press and hold the "S1" and "S2" button for 5 seconds. You can scan and add Timer by APP.

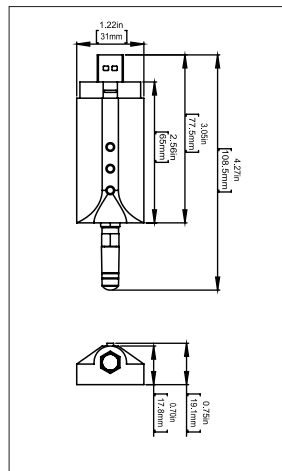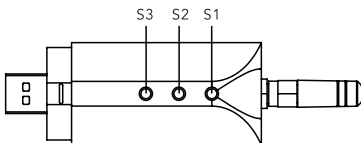

TECHNICAL DATA

Input Voltage	USB 5V
Input Current	1A Max
Bluetooth Transmit	100ft Max.
Radio Frequency	2.4GHz ± 5MHz
Bluetooth Version	5.0 Housing
Warranty	5years
Operating Temperature	-30°C to 55°C, -22°F to 131°F
Storage Temperature	-30°C to 85°C, -22°F to 185°F
IP rating	IP20

ORDERING GUIDE

Part Number	Description
GT-001-GE	Energy Monitoring USB Dongle and Real Time Clock