

3.5mm Audio Jack Connector DC Fixture Controller with Time Keeper Function

SPECIFICATION

ANT-5-4T-CON-BLE-GE-TM features an integrated Range Extender to be used for maintaining mesh quality across long distances, which is designed for outdoor applications. It allows for 0-10v dimming, and is made to fit into a Bluetooth® mesh system.

It features a battery backup unit to provide continuous time operation during power outages. The battery is maintained by the integrated Charge Keeper and maintains master timing for up to 24 hours. Each unit is assembled with plug and play base. No need to add other extra time keeper.



FEATURES AND BENEFITS

Construction

- ANT-5-4T-CON-BLE-GE-TM is suitable for a variety of indoor and outdoor applications. It comes with Low Voltage Connector, and is IP 65 rated.
- Constructed of white/black PC
- Auxiliary power from Dimming-to-off LED driver for ease of setup and operation.

Electrical

- ANT-5-4T-CON-BLE-GE-TM provides reliable time synchronization for each node of the wireless mesh network.
- Programmable settings, including time delay and brightness, are available through BLUEZONE app.

- Features such as parameter profiles, manual dimming control, and real-time feedback from the sensor can speed up configuration and provide custom user control.
- Bluetooth® range is 500'(150m) line of sight and highly dependent on the integration of fixtures, surrounding environment. It is recommended to conduct testing for range accuracy.
- Input Voltage | Current Consumption: 12-24 VDC | 50 mA.

Installation

- Plug in & play design, low voltage connector, match with all Z10 base.
- Plug in & play design, low voltage connector, match with all Z10 base.

- Operating temperature range of -20°C to +75°C.
- Max mounting Height: 40ft(12m).
- Available with magnetic reset (Touch the top part of sensor for 5 seconds).


Installation

- 5 years warranty.

Warranty

- FCC
- ETL
- DLC
- CE
- Bluetooth® NLC
- Declaration ID: D062134

DIMENSIONS AND APPEARANCE

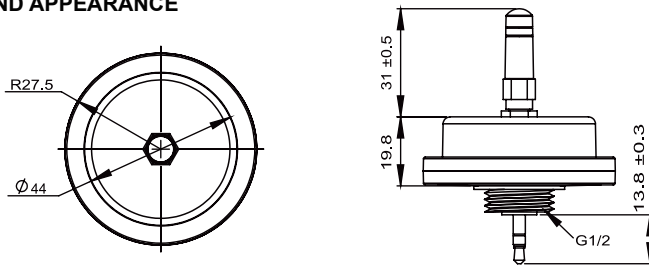

ORDERING GUIDE

Part Number	Description
ANT-5-4T-BLE-CON-GE-TM	3.5mm Audio Jack Connector DC Fixture Controller with Time Keeper Function